

Camclosure® IS Series Indoor Mini Dome

IS90 SERIES SURFACE MOUNT/IN-CEILING, WDR, DAY/NIGHT, HIGH RESOLUTION

Product Features

- Fully-Integrated Indoor Enclosure with Camera and Lens
- Single Model for Surface Mount and Recessed Ceiling Applications with 4S Adapter Plate
- 4 Camera Options:
 - Day/Night Wide Dynamic Range (WDR): Pixel-Based Imager for Accurate Color Representation, Progressive Scan
 - Day/Night High Resolution: 540 TVL
 - Wide Dynamic Range (WDR): Pixel-Based Imager for Accurate Color Representation, Progressive Scan
 - High Resolution Color: 540 TVL
- Varifocal Lens Options: 3 mm to 9.5 mm, 9 mm to 22 mm
- Fixed Lens Options: 3 mm, 3.6 mm, 6 mm, 8 mm, 12 mm
- Includes Both Composite and Unshielded Twisted Pair (UTP) Outputs
- All Models Include 1 Smoked Bubble, 1 Clear Bubble, and 1 Liner
- Shipped Completely Assembled, Easy to Install
- 12 VDC or 24 VAC Operation, Autosensing
- Manual, 3-Axis (Pan/Tilt/Rotation) Positioning Allows Adjustment for Optimum Camera Rotation and Placement
- Housing Available in White or Black
- Service Connector for Video Output



IS90 SERIES DOME
SHOWN WITH OPTIONAL
PENDANT WALL MOUNT (IS90-PW)



IS90 SERIES DOME
SHOWN WITH
SURFACE MOUNT RING

NOTE: REMOVE THE SURFACE
MOUNT RING FOR RECESSED
INSTALLATIONS.

Camera Modules

The **IS90 Series Camclosure® Integrated Camera System** offers a large selection of camera and lens options. Available camera modules include the following:

- **Day/night wide dynamic range (WDR) and wide dynamic range:** Pelco's WDR uses a pixel-based imager that adjusts for lighting by pixel. Traditional CCD cameras adjust the entire image for lighting conditions that appear in a small portion of the image or that are not extreme. Different lighting problems occur at night. Car headlights and parking lot lights are good examples of problematic video images. Use Pelco's Day/Night WDR where you need the camera to adjust from extreme lighting to low light conditions.
- **Day/night high resolution (540 TVL) color camera** with auto iris, varifocal lens; Application examples include environments that require monochrome images at night and color images during the day.
- **High (540 TVL) resolution color camera** with auto iris, varifocal lens or fixed iris lens; application examples include all general-purpose environments.

Enclosure Modules

The **IS90 Series Camclosure Integrated Camera System** integrates a camera and lens package into a small, versatile indoor enclosure that can be mounted directly to, or recessed into, a ceiling or wall. The **IS90 Series** features a three-axis camera and lens positioning system that is capable of 360 degrees of tilt, and 360 degrees of rotation.

The **IS90 Series** is shipped completely assembled, making installation fast and easy. To surface-mount the unit, remove it from the box, attach it to the mounting surface, and connect video and power. For recessed installations, simply remove the surface mount ring (no tools required) and then install the unit inside a ceiling or wall. A 4S adapter plate is supplied with the unit for electrical box installations.



C3425 / REVISED 7-11-08



U.S. Patents D497,927 S; 6,715,939 B2; 6,805,498 B2

International Standards
Organization Registered Firm;
ISO 9001 Quality System



TECHNICAL SPECIFICATIONS

GENERAL

Pan/Tilt Adjustment	Manual
Pan	360°
Tilt	140° (20° to 160° range)
Rotation	360°
Construction	
Back Box and Surface Mount Ring	ABS plastic
Bubble	Polycarbonate
Finish	White or black
Light Attenuation	
Smoked	f/1.5 light loss
Clear	Zero light loss
Environment	Indoor
Operating Temperature	32° to 120°F (0° to 49°C)
Unit Weight	0.52 lb (0.24 kg)
Shipping Weight	2 lb (0.91 kg)

ELECTRICAL



Input Voltage*	12 VDC or 24 VAC (±10%), autosensing
Synchronization	Internal or AC line lock
Power Consumption	<3 W (DW/CW models) <4 W (DN/CH/C models)

VIDEO

Signal System	NTSC or PAL
Video Output	
Composite	1 Vp-p, 75 ohms
UTP	1 Vp-p, 100 ohms
Video Connectors	1 composite BNC and 1 UTP
Service Connector	3-conductor, 2.5 mm connector for video output to optional IS-SC cable

CERTIFICATIONS/PATENTS

- CE, Class B
- FCC, Class B
- UL/cUL Listed
- C-Tick
- U.S. Patents D497,927 S; 6,715,939 B2; 6,805,498 B2

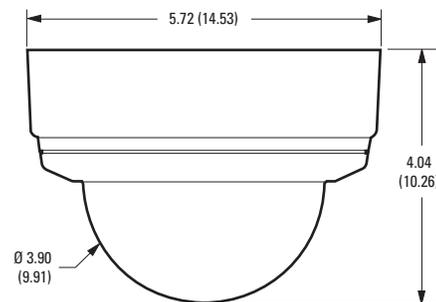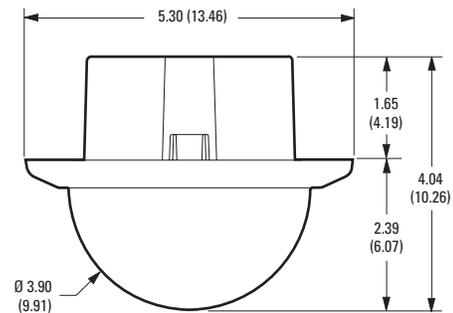

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.

*24 VAC power is recommended when installing any Camclosure Integrated Camera System under fluorescent lighting conditions.

TECHNICAL SPECIFICATIONS

CAMERA SPECIFICATIONS

	Day/Night Wide Dynamic Range Varifocal, Auto Iris (DW Series)	Day/Night High Resolution Varifocal, Auto Iris (DN Series)	Wide Dynamic Range Varifocal, Auto Iris (CW Series)	High Resolution Varifocal, Auto Iris (CH Series)
Imaging Device	1/3-inch Pixel Based Imager	1/3-inch Interline Color CCD	1/3-inch Pixel Based Imager	1/3-inch Interline Color CCD
Picture Elements	720 (H) x 540 (V)	NTSC: 768 (H) x 494 (V) PAL: 752 (H) x 582 (V)	720 (H) x 540 (V)	NTSC: 768 (H) x 494 (V) PAL: 752 (H) x 582 (V)
Dynamic Range (DW/CW only)	102 dB typical 120 dB maximum	—	102 dB typical 120 dB maximum	—
Scanning System	2:1 Interlace/ Progressive (DIP switch)	2:1 Interlace	2:1 Interlace/ Progressive (DIP Switch)	2:1 Interlace
Horizontal Resolution	NTSC: 504 TV lines PAL: 504 TV lines	NTSC: 540 TV lines PAL: 540 TV lines	NTSC: 504 TV lines PAL: 504 TV lines	NTSC: 540 TV lines PAL: 540 TV lines
Signal-to-Noise Ratio	>53 dB	>50 dB	>53 dB	>50 dB
Minimum Illumination	Color (day): 0.8 lux SENS 8X: 0.2 lux B-W (night): 0.08 lux SENS 8X: 0.02 lux (f/1.0, 40 IRE, AGC on, 75% scene reflectance, 3.0-9.5 mm lens)	Color (day): 0.15 lux B-W (night): 0.015 lux (f/1.0, 40 IRE, AGC on, 75% scene reflectance, 3.0-9.5 mm lens)	Color (day): 0.8 lux SENS 8X: 0.2 lux (f/1.0, 40 IRE, AGC on, 75% scene reflectance, 3.0-9.5 mm lens)	0.3 lux (f/1.0, 40 IRE, AGC on, 75% scene reflectance, 3.0-9.5 mm lens)
Day/Night Operation				
Day	Infrared (IR) cut filter	Infrared (IR) cut filter and optical low pass filter	—	—
Night	No filter	Optical low pass filter	—	—
Filter Switch Threshold	Dusk 4 lux Dark 1 lux	0.15 lux	—	—
Gain Control	Auto (36 dB maximum)	Auto/Manual (DIP switch)	Auto (36 dB maximum)	Auto/Manual (DIP switch)
Exposure	Auto (1/15 - 1/22,000)	Auto (1/60 - 1/100,000)	Auto (1/15 - 1/22,000)	Auto (1/60 - 1/100,000)
White Balance	Auto or manual (DIP switch), 2800°K - 7500°K	Auto or manual (DIP switch), 2500°K - 9500°K	Auto or manual (DIP switch), 2800°K - 7500°K	Auto or manual (DIP switch), 2500°K - 9500°K
Backlight Compensation	Auto	ON/OFF (DIP switch)	Auto	ON/OFF (DIP switch)

*Preliminary specifications for C Series models. Contact factory for more information.

LENS SPECIFICATIONS

Series	Varifocal With Auto Iris				Fixed Focal Without Iris				
	DW/CW Series		DN/CH Series		CH Series				
Focal Length	3.0 mm ~ 9.5 mm	9.0 mm ~ 22.0 mm	3.0 mm ~ 9.5 mm	9.0 mm ~ 22.0 mm	3 mm	3.6 mm	6.0 mm	8.0 mm	12.0 mm
Format Size	1/3-inch	1/3-inch	1/3-inch	1/3-inch	1/3-inch	1/3-inch	1/3-inch	1/3-inch	1/3-inch
F-Number (f)	1.0 to 1.7	1.5 to 3.0	1.0 to 1.7	1.5 to 3.0	2.0	2.0	2.0	2.0	2.2
Operation									
Iris	Auto	Auto	Auto	Auto	N/A	N/A	N/A	N/A	N/A
Focus	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
Zoom	Manual	Manual	Manual	Manual	N/A	N/A	N/A	N/A	N/A
Angle of View**									
Horizontal	100.4° to 31.6°	32.4° to 13.6°	95.0° to 30.2°	30.6° to 13.0°	90.2°	72.9°	40.1°	31.5°	19.7°
Diagonal	131.6° to 39.6°	41.1° to 17.2°	123.6° to 37.6°	39.2° to 16.4°	120.0°	92.0°	53.0°	40.0°	28.0°
Vertical	72.8° to 23.8°	23.8° to 10.2°	69.0° to 22.6°	22.6° to 9.8°	65.4°	54.1°	30.4°	23.7°	15.0°

**Focal length specifications presume a 10% horizontal and 4% vertical monitor overscan.

SYSTEM MODELS AND ACCESSORIES


MODEL NUMBERS

Dome Only

ICS-090HNU IS90 Series indoor dome (no camera/lens), white housing; includes 1 smoked bubble, 1 clear bubble, and 1 liner.
 ICS-090BHNU IS90 Series indoor dome (no camera/lens), black housing; includes 1 smoked bubble, 1 clear bubble, and 1 liner.

System Numbers

Use this table to create a model number to specify your IS90 Series Camclosure. Note the additional information below the table for fixed lens and NTSC/PAL options. For example, IS90B-DNV9X is the model number for a PAL version color day/night high resolution camera with a 3 mm to 9.5 mm varifocal lens in a black housing. For information, contact your Pelco sales representative.



Housing (a)	Camera (b)	Lens (c)	PAL (d)
B Black Do not use for white housing.	DW Color Day/Night Wide Dynamic Range DN Color Day/Night High Resolution CW Color Wide Dynamic Range CH Color High Resolution	Available with all cameras: V9 Varifocal, 3 mm to 9.5 mm, Auto Iris V22 Varifocal, 9 mm to 22 mm, Auto Iris Available with CH cameras: 3 Fixed, 3 mm 3.6 Fixed, 3.6 mm 6 Fixed, 6 mm Available with CH cameras: 8 Fixed, 8 mm 12 Fixed, 12 mm	DN and CH cameras only: X PAL Do not use for NTSC.

All models include 1 smoked bubble, 1 clear bubble, and 1 liner.

RECOMMENDED POWER SUPPLIES

TF2000 Power supply for one 24 VAC camera, 20 VA
 MCS Series Multiple 24 VAC camera power supply, indoor
 MCS*E Series Multiple 24 VAC camera power supply, indoor

OPTIONAL ACCESSORIES

IS-SC 4-foot service/monitor cable; compatible with any standard monitor BNC connector
 IS90-P White pendant mount adapter
 IS90B-P Black pendant mount adapter
 IS90-PW White pendant wall mount
 IS90B-PW Black pendant wall mount



Pelco, Inc. Worldwide Headquarters:
 3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX: (800) 289-9150
International Tel: +1 (559) 292-1981 • FAX: +1 (559) 348-1120
www.pelco.com

Pelco, the Pelco logo, and Camclosure are registered trademarks of Pelco, Inc. Product specifications and availability subject to change without notice.
 ©Copyright 2008, Pelco, Inc. All rights reserved.